





LV 9000, LV 9500

Snap-Locking Waterproof Connectors Pre-Filled with Silicone

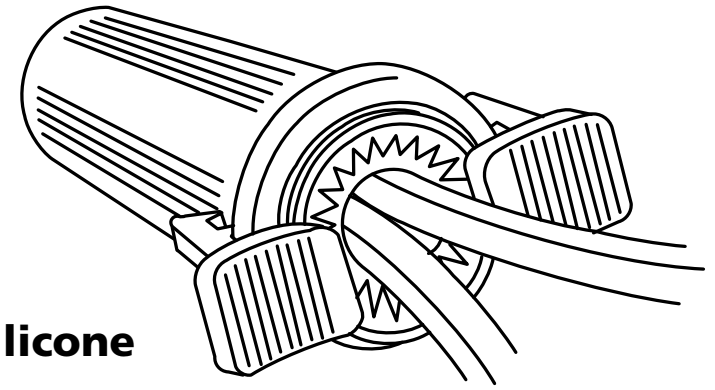

LV 9000 24 to 18 AWG - Yellow


Minimum 2 #24 AWG - Maximum 5 #18 AWG

1.1550in, 29.34mm wide (handles)

.772 in, 19.55mm wide (cylinder top)

1.849 in, 46.96mm (at tallest including handles)

- o Sealant temperature - -40° F to 400° F
- o Copper and/or aluminum wires, solid or stranded
- o For low-voltage connections only - Maximum 30 Volts

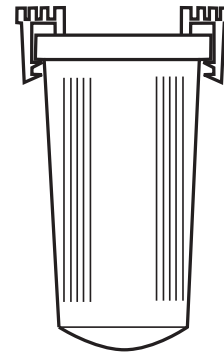

LV 9500 18 to 10 AWG - Black


Minimum 2 #18 AWG - Maximum 3 #10 AWG with 1 #18 AWG

1.480in, 37.64mm wide (handles)


1.157 in, 29.63 mm wide (cylinder top)

2.270 in, 57.68mm (at tallest including handles)


- o Sealant temperature - -40° F to 400° F
- o Copper and/or aluminum wires, solid or stranded
- o For low-voltage connections only - Maximum 30 Volts

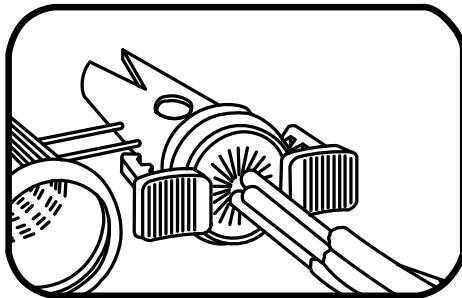


1. Insert

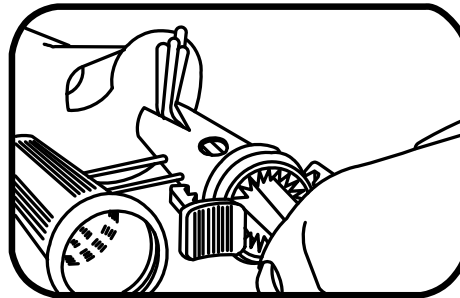



2. Bend

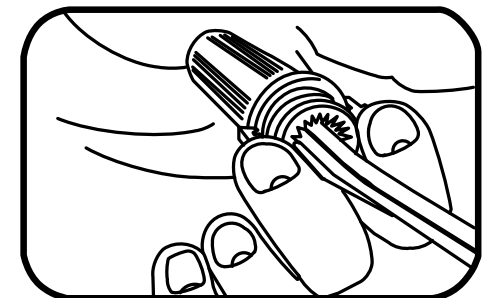

3. Close



When using both solid and stranded wire, wrap stranded wire around untwisted solid wire.



Special LV 9500 features - Bending sleeve for solid wires and round hole below "V" to accommodate large wire combinations.